

01

SWITCH

1 GANG 1WAY / 1 GANG 2 WAY SWITCH

DM1-11 / DM1-12 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC110-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	30×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS DM1-11W DM1-11D DM1-11B
 DM1-12W DM1-12D DM1-12B

03

SWITCH

1 GANG 1WAY HEATER SINGLE POLE C/W NEON SWITCH

DM1-1HN SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC220-250V 50/60Hz
Current	20A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS DM1-1HNW DM1-1HND DM1-1HNB

02

SWITCH

1 GANG DOOR BELL SWITCH

DM1-B SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC110-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	30×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS DM1-BW DM1-BD DM1-BB

04

SWITCH

1 GANG 2 WAY HEATER SINGLE POLE SWITCH

DM1-2HN SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC220-250V 50/60Hz
Current	20A
Size	86×88mm
Cut-Out	30×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS DM1-2HNW DM1-2HND DM1-2HNB

05

SWITCH

1 GANG 1WAY HEATER SINGLE POLE C/W NEON SWITCH DM1-145HN SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC220-250V 50/60Hz
Current	45A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-145HNW ● DM1-145HND ● DM1-145HNB

07

SWITCH

2 GANG AUTO GATE SWITCH DM1-2A SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	59×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-2AW ● DM1-2AD ● DM1-2AB

06

SWITCH

1 GANG AUTO GATE SWITCH DM1-1A SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	30×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-1AW ● DM1-1AD ● DM1-1AB

08

SWITCH

2 GANG 1WAY / 2 GANG 2 WAY SWITCH DM1-21 / DM1-22 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC110-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	59×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-21W ● DM1-21D ● DM1-21B

● DM1-22W ● DM1-22D ● DM1-22B

09

SWITCH

3 GANG 1WAY SWITCH

DM1-31 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC110-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	59×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-31W ● DM1-31D ● DM1-31B

11

SWITCH

4 GANG 1WAY SWITCH

DM1-41 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC110-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	59×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-41W ● DM1-41D ● DM1-41B

10

SWITCH

3 GANG 2 WAY SWITCH

DM1-32 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC220-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	59×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-32W ● DM1-32D ● DM1-32B

12

SWITCH

4 GANG 2 WAY SWITCH

DM1-42 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC220-250V 50/60Hz
Current	10AX
Size	86×88mm
Cut-Out	59×64mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-42W ● DM1-42D ● DM1-42B

13

SWITCH

1 GANG ROTARY LIGHT DIMMER SWITCH DM1-DS SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Power	500W
Size	86×88mm
Cut-Out	53×60mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-DSW ● DM1-DSD ● DM1-DSB

15

DATA & TEL

2 GANG CAT6 COMPUTER / DATA OUTLET DM1-2C6 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Feature	Safety
Performance	Anti-Leakage
Size	86×88mm
Cut-Out	53×60mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-2C6W ● DM1-2C6D ● DM1-2C6B

14

DATA & TEL

1 GANG CAT6 COMPUTER / DATA OUTLET DM1-C6 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Feature	Safety
Performance	Anti-Leakage
Size	86×88mm
Cut-Out	28×60mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-C6W ● DM1-C6D ● DM1-C6B

16

DATA & TEL

1 GANG TELEPHONE OUTLET DM1-TEL SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	16A
Size	86×88mm
Cut-Out	28×60mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-TELW ● DM1-TELD ● DM1-TELB

17

DATA & TEL

1 GANG SATELLITE + TV OUTLET DM1-TF SERIES

SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	16A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-TFW ● DM1-TFD ● DM1-TFB

18

DATA & TEL

1 GANG TV OUTLET DM1-1TV

SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	16A
Size	86×88mm
Cut-Out	28×56mm
IP Rating	IP20
Color	White
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-1TV

19

SOCKET

1 GANG FLAT PIN SINGLE POLE SOCKET DM1-S13 SERIES

SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	13A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS ● DM1-S13W ● DM1-S13D ● DM1-S13B

20

SOCKET

1 GANG UNIVERSAL 3 PINS C/W NEON SOCKET DM1-S13B SERIES

SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	13A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-S13BW ● DM1-S13BD ● DM1-S13BB

21 SOCKET

1 GANG FLAT PIN SINGLE POLE C/W NEON SOCKET DM1-SN13 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	13A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-SN13W ● DM1-SN13D ● DM1-SN13B

23 SOCKET

1 GANG MULTIPLE USB + TYPE C C/W NEON SOCKET DM1-1U1C SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	13A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-1U1C ● DM1-1U1CG ● DM1-1U1CB

22 SOCKET

1 GANG ROUND PIN SINGLE POLE C/W NEON SOCKET DM1-SN15 SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	15A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White
Working Temp.	-20°C-45°C
Package	100 Units / Carton

COLOR OPTIONS

● DM1-SN15W ● DM1-SN15D ● DM1-SN15B

24 SOCKET

1 GANG MULTIPLE 2 USB C/W NEON SOCKET DM1-2U SERIES



SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	13A
Size	86×88mm
Cut-Out	57×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C-45°C
Package	100 Units / Carton


COLOR OPTIONS

● DM1-2U ● DM1-2UD ● DM1-2UB

25

SOCKET

2 GANG FLAT PIN SINGLE POLE C/W NEON SOCKET DM1-S2 SERIES

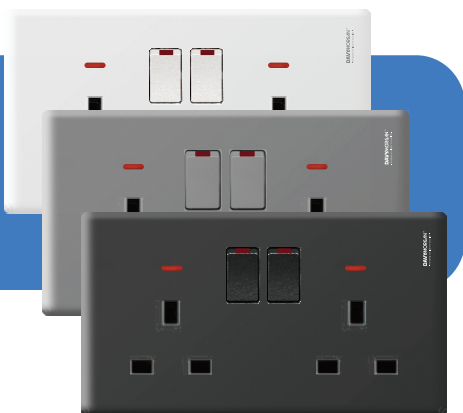

SPECIFICATION

Application	Indoor Commercial & Residential
Input Voltage	AC175-250V 50/60Hz
Current	13A
Size	145×88mm
Cut-Out	116×56mm
IP Rating	IP20
Color	White / Dark Grey / Black
Working Temp.	-20°C~45°C
Package	100 Units / Carton

COLOR OPTIONS DM1-S2W DM1-S2D DM1-S2B